

Technical data sheet for

## P8M DOUBLE STACKED

Full Size Manual / Electric Prover/Holding Cabinet Double Stacked



P8M/2

P8M units shall be Blue Seal electrically heated Turbofan Prover and Holding Cabinets. The prover and holding cabinets shall have double skin construction with stainless steel interior and exterior sides, front and top. Doors shall be side hinged and field reversible. Units shall have capacity for up to 16 half size sheet pans or 8 full size sheet pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinets shall be controlled by a mechanical thermostat and humidity via a control of the water tank, thermometers shall indicate the cabinet temperature. Prover and Holding Cabinets shall be fitted with 13A plug-in cordsets. The prover and holding cabinets shall be double stacked using Double Stacking Kit DSKP8. Units shall be supplied in 100% recyclable shipping packaging.

Double stacked models are supplied as two individual prover and holding cabinets and a double stacking kit for field assembly.

### STANDARD FEATURES

#### DOUBLE STACKED

- Two 8 full size sheet pan capacity
- Two 16 half size sheet pan capacity
- Compact 735mm width
- Full stainless steel spacer frame

#### PROVER/HOLDING CABINET FEATURES (each)

- Dual function Prover and Holding Cabinet
- 8 18" x 26" / 460 x 660 full size sheet pan capacity
- 16 18" x 13" / 460 x 330 half size sheet pan capacity
- 8 600 x 400 tray capacity (optional kit)
- 76mm tray spacing
- 13A plug-in cordset fitted
- Full double skin construction
- Auto water fill system with optional integrated water filter kit
- Continuous door seal
- Side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Off / Prove / Hold mode selection
- Low velocity circulation fan system
- Mechanical thermostat
- Humidity level control
- Dual halogen cabinet interior lamps
- Cabinet temperature display thermometer

#### ACCESSORIES

- 600 x 400 tray racking kit
- Optional 3M Cuno water filter kit complete with cartridge and connection fittings
- Installs in pre-fitted rear housing of cabinet for flush rear installation

### P8M/2 Full Size Manual / Electric Prover/Holding Cabinet

#### CONSTRUCTION- PROVERS

304 stainless steel interior cabinet  
 Stainless steel front, sides and top exterior  
 Stainless steel interior side racks  
 Stainless steel frame side hinged door  
 5mm thick door glass  
 Stainless steel control panel  
 Aluminised coated steel base and rear panels

#### CONSTRUCTION - DOUBLE STACKING KIT

Stainless steel spacer frame

#### CONTROLS

Off / Prove / Holding mode selector switch.  
 Mechanical thermostat 20-85°C  
 Air heating ON control panel indicator  
 Humidity level control  
 Humidity tank ON control panel indicator  
 Cabinet temperature thermometer  
 Auto-fill water system standard

#### CLEANING

Stainless steel top and side exterior panels  
 Stainless steel interior chamber  
 Easy access to all interior surfaces  
 Fully removable stainless steel rack support  
 Removable humidity water tank (no tools)

#### SPECIFICATIONS

Electrical Requirements (each prover)  
 230-240V, 50Hz, 1P+N+E, 1.5kW, 6.3A  
 13A cordset fitted

Water Requirements (optional)  
 Cold water connection 3/4" BSP male  
 550kpa maximum inlet pressure /  
 150kpa minimum inlet pressure

#### External Dimensions

Width 735mm  
 Height 1792mm  
 Depth 810mm

#### Prover Internal Dimensions (each prover)

Width 465mm  
 Height 730mm  
 Depth 700mm  
 Volume 0.24m3

Nett Weight  
 164kg

#### Packing Data (P8M provers each)

95.3kg  
 0.76m3  
 Width 760mm  
 Height 1080mm  
 Depth 925mm

### Double Stacking Kits

For after market double stacking two P8M prover/holding cabinets  
 DSKP8 - Double stacking kit

#### INSTALLATION CLEARANCES

Rear 0mm  
 LH Side 0mm  
 RH Side 25mm

#### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required



blue-seal.co.uk  
 turbofanoven.com

United Kingdom  
 Blue Seal Limited


Unit 67  
 Gravelly Business Park  
 Gravelly  
 Birmingham B24 8TQ  
 England  
 Telephone 0121-327 5575  
 Facsimile 0121-327 9711  
 sales@blue-seal.co.uk  
 www.blue-seal.co.uk

Australia  
 Moffat Pty Limited

740 Springvale Road  
 Mulgrave, Victoria 3170  
 Australia  
 Telephone 03-9518 3888  
 Facsimile 03-9518 3833  
 vsales@moffat.com.au  
 www.moffat.com.au

New Zealand  
 Moffat Limited

Christchurch  
 45 Illinois Drive  
 Izone Business Hub  
 Rolleston 7675  
 Telephone +64 3-983 6600  
 Facsimile +64 3-983 6660  
 sales@moffat.co.nz  
 www.moffat.co.nz

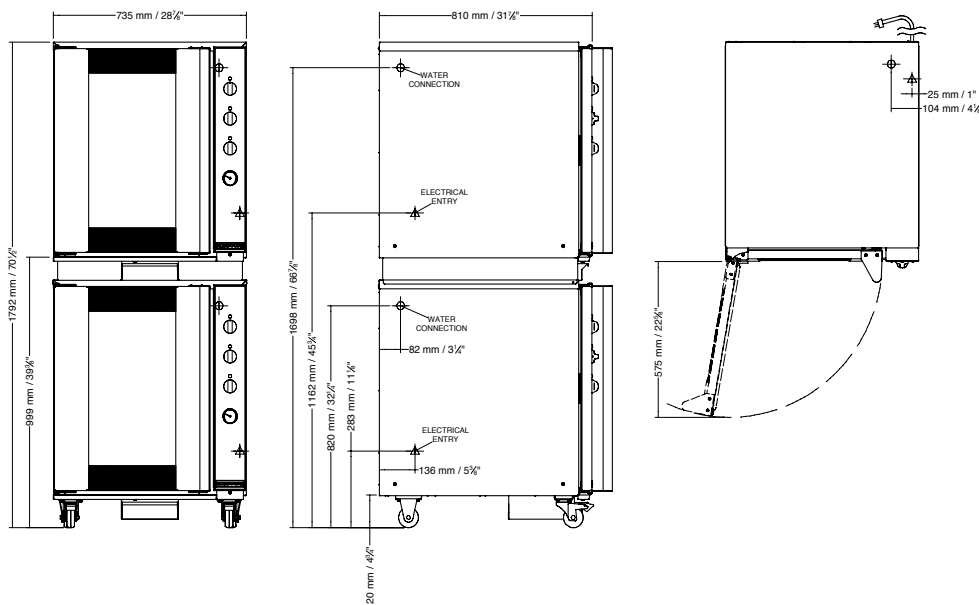

Designed and manufactured by



#### ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.