

Technical data sheet for

## EC40M5 ON THE SK40A STAND

Full Size 5 Tray Manual / Electric Combi Oven on a Stainless Steel Stand



### STANDARD FEATURES

- Electric direct steam version
- 5 x Full size steam pan capacity
- 2¾" / 70mm tray spacing
- Compact 32" / 812mm wide
- 7kW heating power
- Hand shower with fittings and connections included
- Electro-mechanical controls to set time, temperature and operation mode
- Temperature range 122-500°F / 50-260°C
- Manual timer range up to 120 minutes
- Selector for convection, steam and combi modes
- Door open rapid cool down function
- Manual cleaning system with externally-connected hand shower
- Autoreverse (automatic inversion of the direction of the fan) for perfectly uniform cooking
- Manual chamber venting
- LED chamber lighting
- Perfectly smooth cooking chamber walls with rounded edges
- Double-glazed door with thermo-reflective tempered glass
- Adjustable hinges for optimal door seal

### ACCESSORIES

- Turbofan SK40A Oven Stand



### EC40M5

Unit shall be a Blue Seal electrically heated Turbofan direct steam injection combination convection steam oven. The oven shall have a stainless steel oven chamber with 5 x Full Size Steam Pan, 7.5kW power rating and a auto-reversing direction fan. Oven door shall be vented safe touch and feature LED oven chamber lighting. Electro-mechanical controls shall provide Convection, Steam, and Combi cooking mode selection, door open rapid cool down function, temperature control 122-500°F, manual timer for up to 120 minutes, and a manual oven vent open/close switch. A water hand shower shall be included as standard. Oven shall be able to be bench mounted on 4" feet or mounted on Turbofan oven stand model SK40A. Unit shall be supplied in 100% recyclable shipping packaging.

### SK40A

Unit shall be a Blue Seal Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with 4 adjustable feet. It shall be fitted with 6 tray runners suitable for full size steam pans. The stand shall be fully compatible with, and support, Turbofan Combi Oven models EC40M5, EC40M7, EC40D5 and EC40D7. Unit shall be supplied in 100% recyclable shipping packaging.

### EC40M5 Full Size Manual/ Electric Combi Oven on a Stainless Steel Stand

#### Dimensions

Width	32" / 812mm
Depth	28½" / 725mm
Height	31½" / 795mm
Weight	163lbs / 74kg

#### Packed Dimensions

Width	35½" / 910mm
Depth	34" / 865mm
Height	35½" / 900mm
Weight	187lbs / 85kg
Volume	25ft³ / 0.71 m³

#### Shelves

Full size steam pan 5	
Shelf Spacings	2¾" / 70mm

#### Power connection requirements

Multi pole circuit breaker and all pole disconnection isolator switch installed near the appliance.

#### Electrical requirements

1-Phase and 3-Phase connection possible. Specify voltage when ordering.  
208V, 60Hz, 3-phase, 7.5kW, 21A/ph, or 208V, 60Hz, 1-phase, 7.5kW, 36A  
240V, 60Hz, 3-phase, 7.5kW, 18A/ph, or 240V, 60Hz, 1-phase, 7.5kW, 32A

#### Water connection requirements

##### Water Supply


2 x ¾" GHT connections  
Cold Water  
Flow pressure 29-73 PSI / 200-500 kPa  
Shut off valve with back flow prevention

##### Water Quality

- total hardness 60-90 ppm
- pH > 7.5
- Cl-(chloride) <30 ppm
- temperature < 122°F / 50°C

##### Drain

- Funnel waste trap/tundish required
- 1½" dia. outlet
- Minimum fall/slope for waste 4°

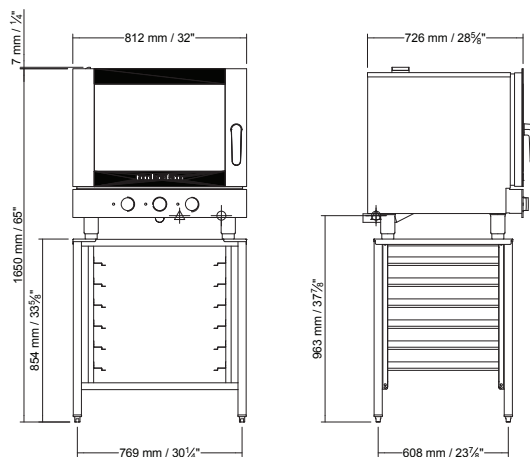

### SK40A Stainless Steel Stand

All stainless steel welded frame over stand for Turbofan EC40 5 tray and 7 tray Series Combi ovens

6 position tray runners  
4 height adjustable feet  
Supplied CKD for assembly on site

#### External Dimensions (SK40A Oven Stand)

Width	32" / 810mm
Height	33¾" / 854mm
Depth	25½" / 650mm

#### Nett Weight (SK40A Oven Stand)

42lbs / 19kg

#### Packing Data (SK40A Oven Stand)

48.5lbs / 22kg  
3.9ft³ / 0.11m³

Width	32½" / 830mm
Height	34¾" / 880mm
Depth	6¾" / 160mm

### INSTALLATION CLEARANCES


Installation requirements (for precise installation instructions, please refer to the unit's installation manual).

- rear 2" / 50mm
- right 2" / 50mm\*
- left 2" / 50mm\*

\*For recessed installations a minimum of 20" / 500mm clearance must be maintained on one of the sides.

If heat sources are located near the Turbofan Combi, ensure that a minimum distance of 16" / 400mm is maintained.

Install in accordance with local body regulations only on horizontal surfaces and not against combustible walls.

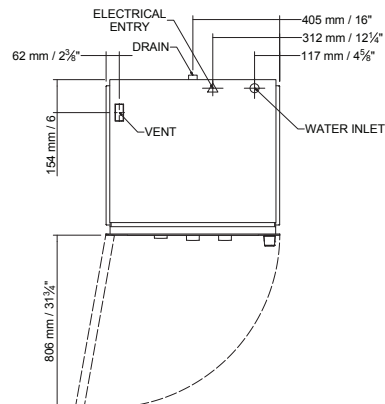

www.blue-seal.ca  
www.turbofanoven.com  
www.servecanada.com

CANADA  
Serve Canada  
40 East Pearce Street  
Richmond Hill ON  
L4B 1B7  
Ph Toll Free 800-263-1455  
Fax 905-731-7687  
Email info@servecanada.com

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.